

Freeman Group Ltd  
STANDING SEAM TRAY SS150

STANDING SEAM material	
0.55mm	Colorsteel® Endura
0.55mm	Colorsteel® Maxx
0.55mm	Zincalume

Ridge/Hip flashing BMT to match  
STANDING SEAM TRAY SS150 material

Flat head screw under-flashing

Under flashing BMT to match  
STANDING SEAM TRAY SS150 material

TRAY stop end


Treated timber batten

20mm air gap

Timber rafter

Vapour barrier/ Roofing Underlay  
and drainage matt to underside  
of tray cladding

12mm min. plywood substrate  
refer Architect or building  
designer for timber treatment

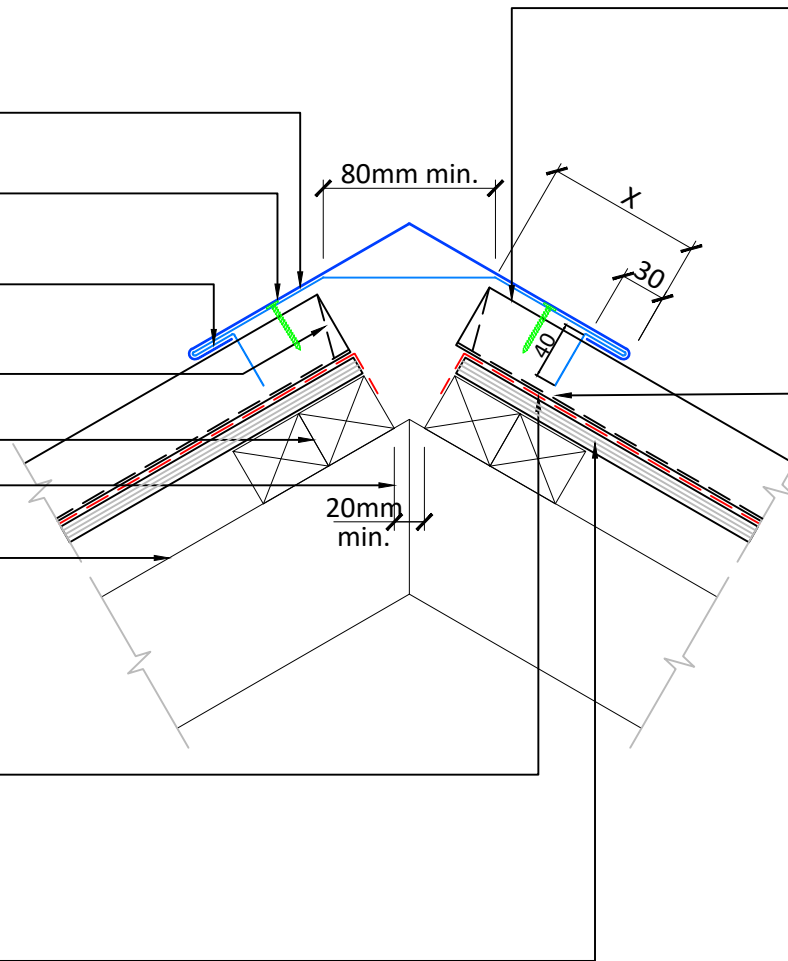

5mm air gap

20mm  
min.

80mm min.

X

30

40

Notes:  
Roof void ventilation may require consideration  
as tray panels do not provide roof ventilation.